

Surpassing your imagination with a twist of creativity!



mar belano











1.5mm Thickness

Exhibiting great mechanical & thermal properties, installed over sturdy flooring, these laminate sheets get sturdy & long-lasting.



UV Protected

The UV films offer protection against moisture, handling and abrasion. The color clarity remains crisp & clear over time.



Scratch Resistance

Laminates that exhibit extraordinary features with assured scratch free application



Termite & Borer Free

Our laminates are specially treated to ensure they remain termite and borer free for several years.



A B O U T U S

Treelam is about innovation, ingeniousness and execution with the finest form and function. Treelam has been specifically curated to make designer and decorative surfaces that have a versatile ethos.

Treelam is a range that flaunts a natural flair, where eco-friendly surfaces become a norm and sustainability creates

phenomenal possibilities of juxtaposing great aesthetics with enormous poise.

Established since 2014, it has an extensive product range consisting of designer laminate and decorative surfaces.
















PU 7725 ★★

PU 7738 ★★




S A T V A R I O

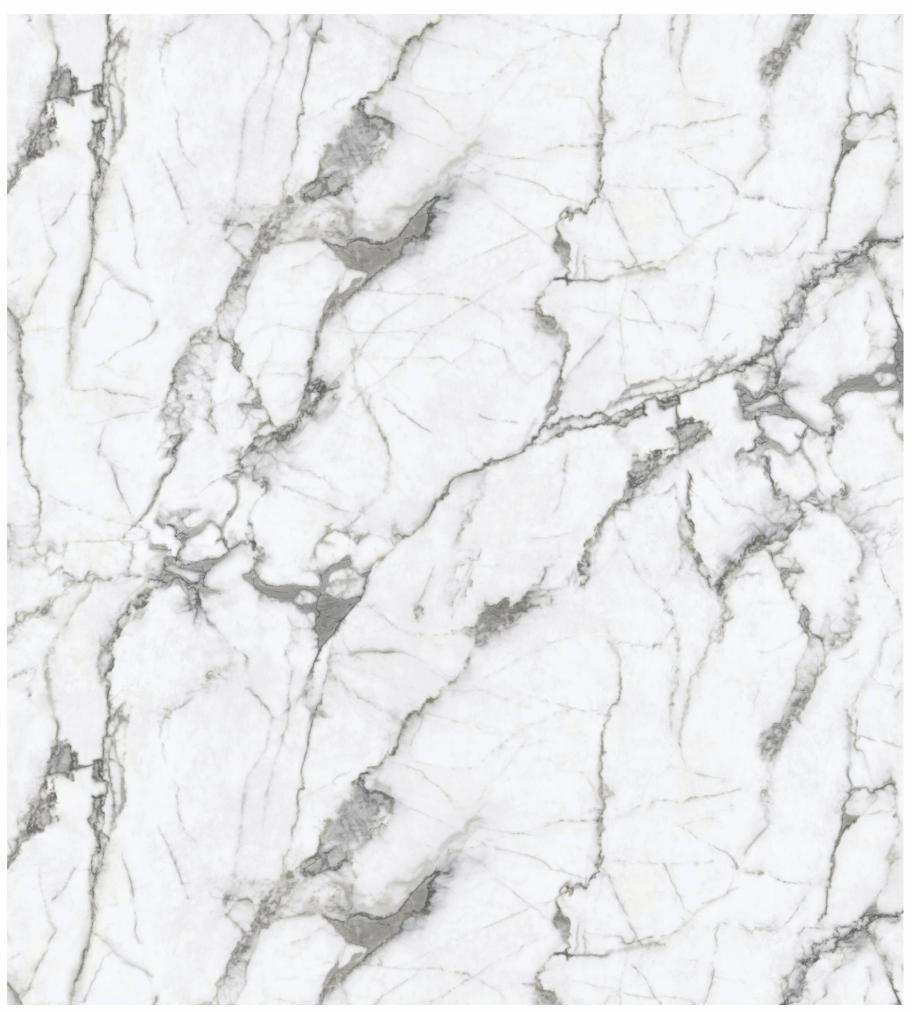

SATVARIO CARRARA



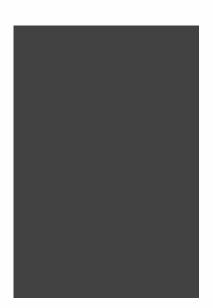




PU 7746 ★★

PU 7758 ★




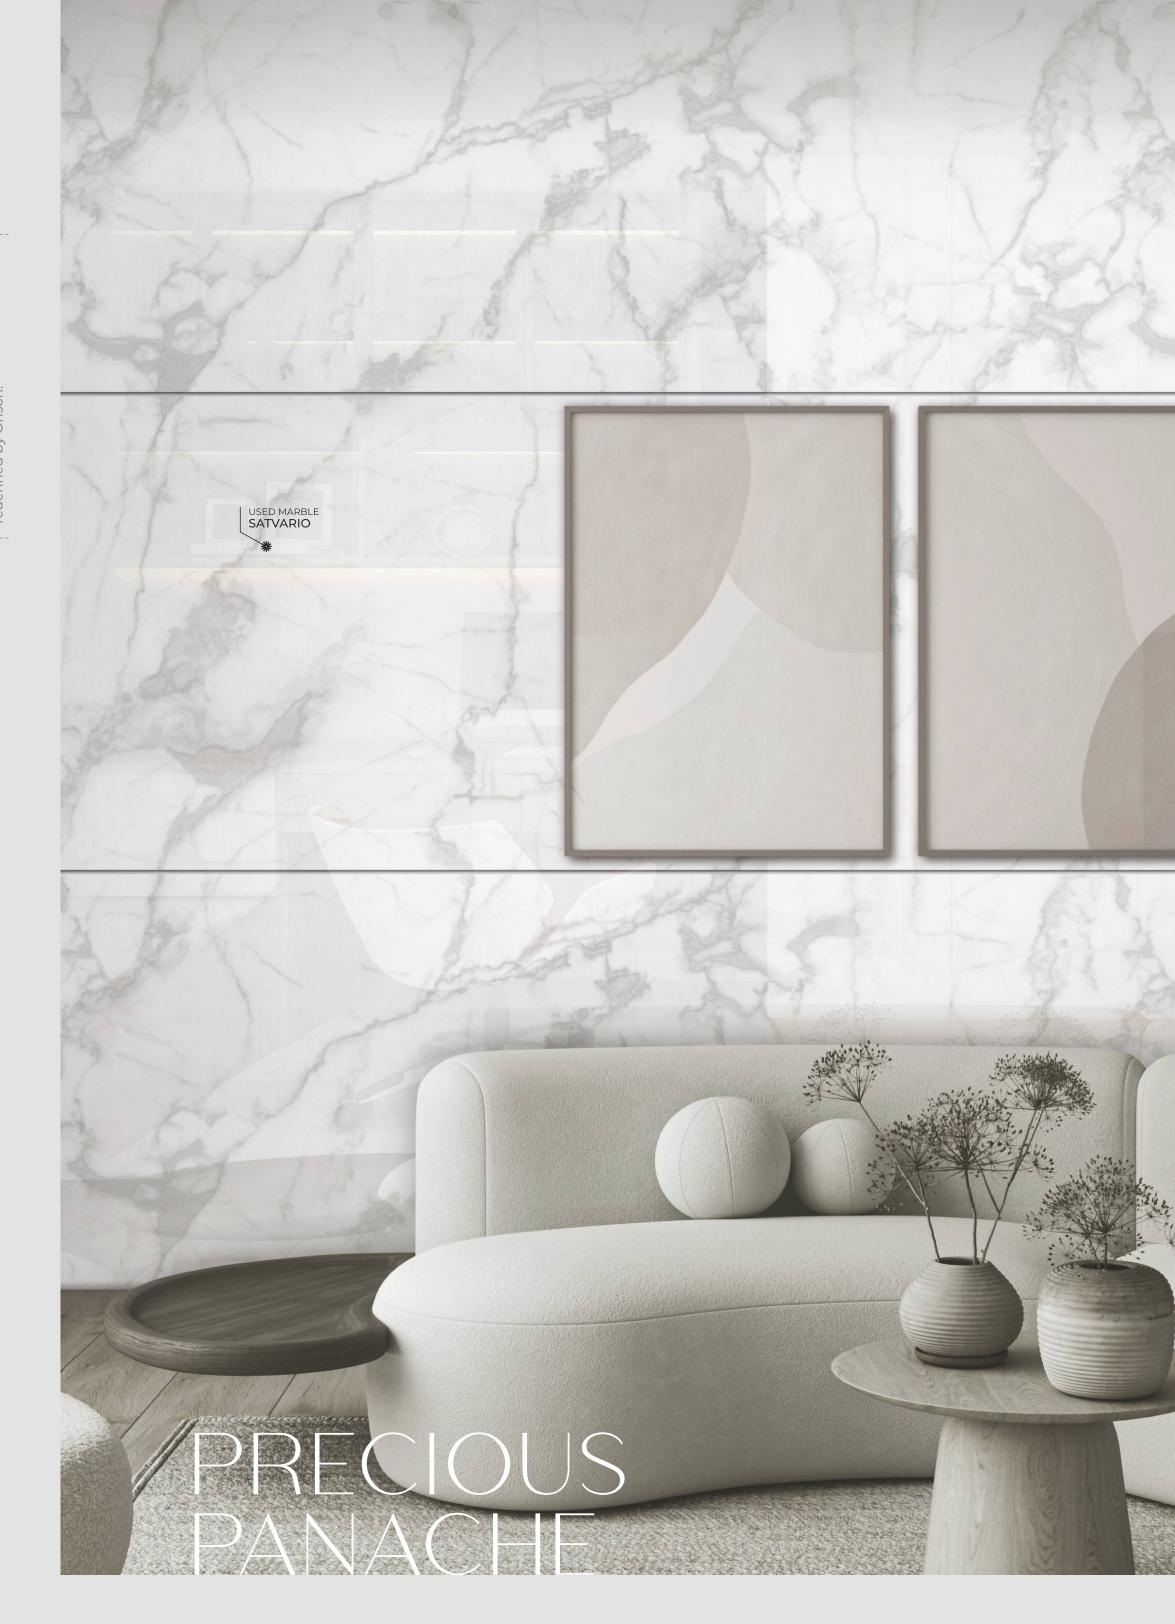







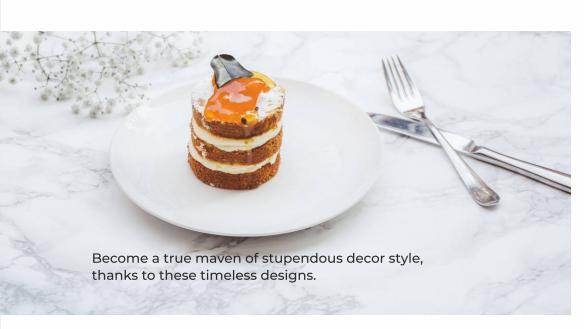



PU 7758 ★★




MICHELANGELO



MICHELANGELO



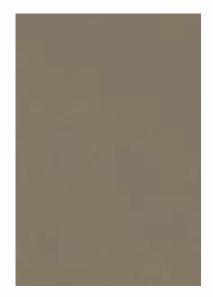



PU 7723 ★★

PU 7724 ★★










CALACATTA GOLD

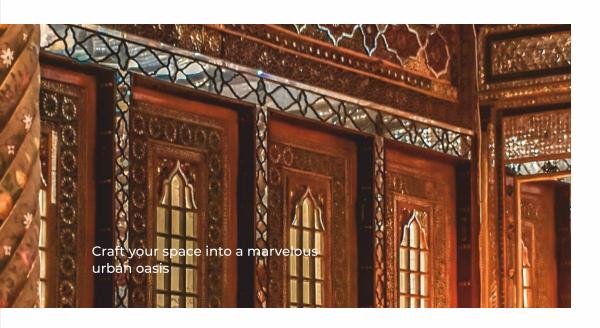




PU 7705 ★





PATAGONIA PEARL



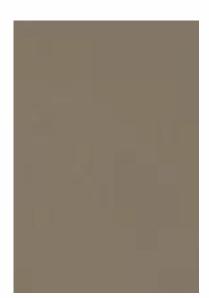




PU 7723 ★★

PU 7724 ★★



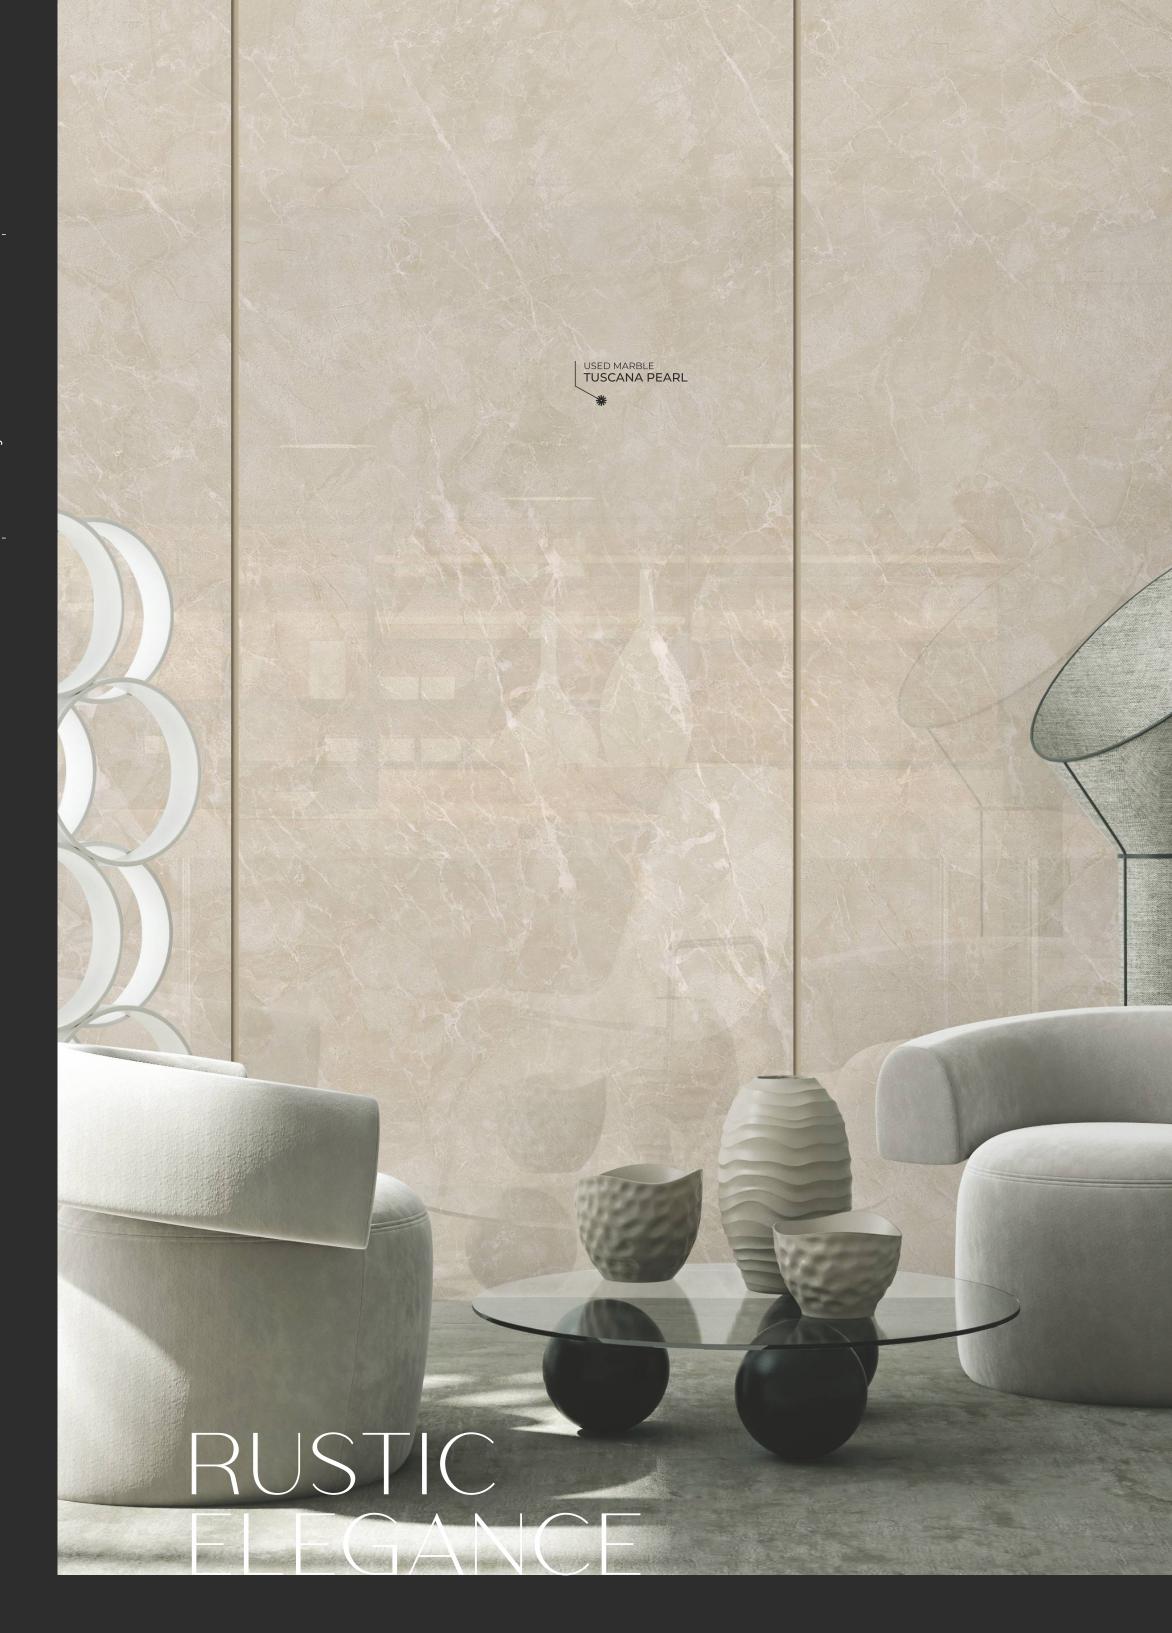





TUSCANA PEARL








PU 7721 ★★


PU 7723 ★★



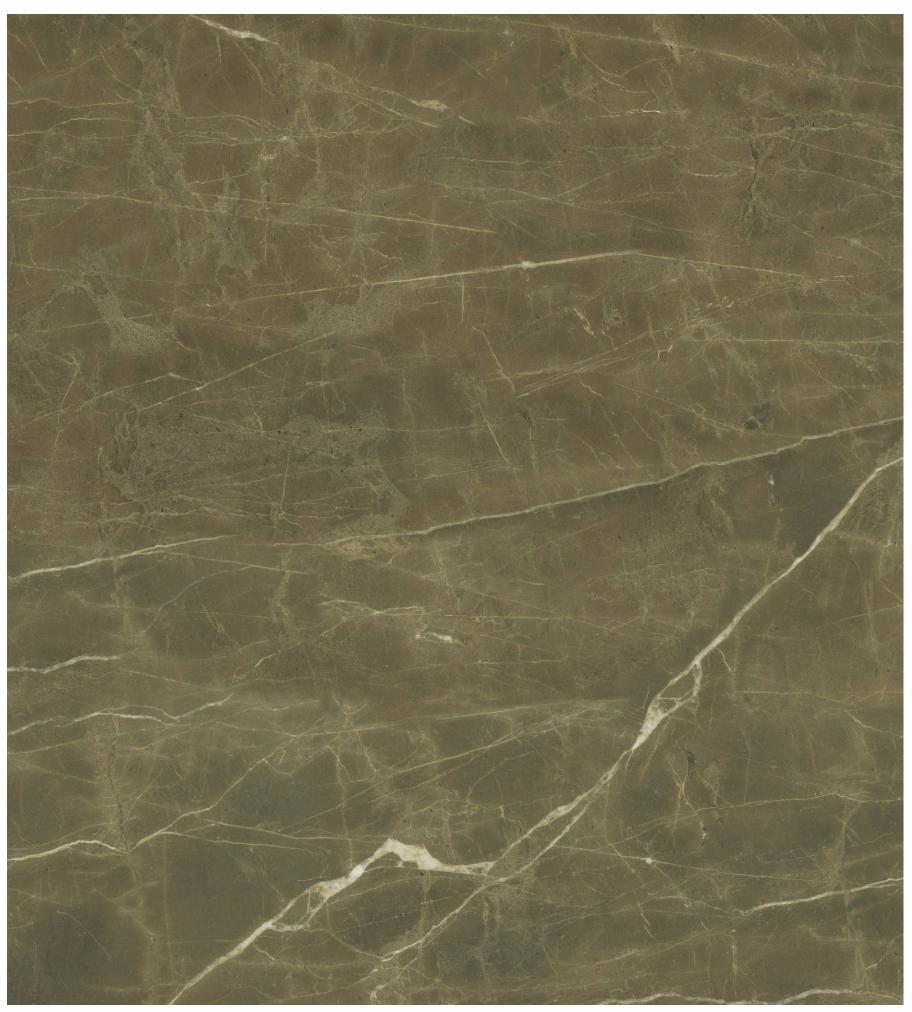

EMPERADOR




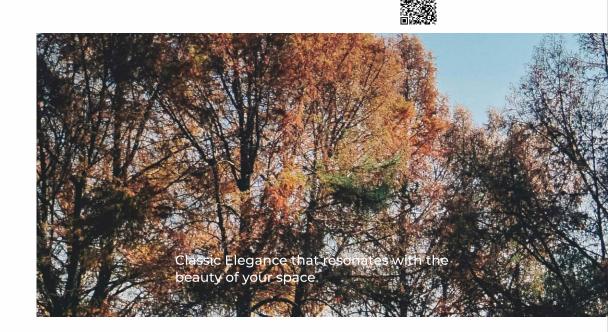








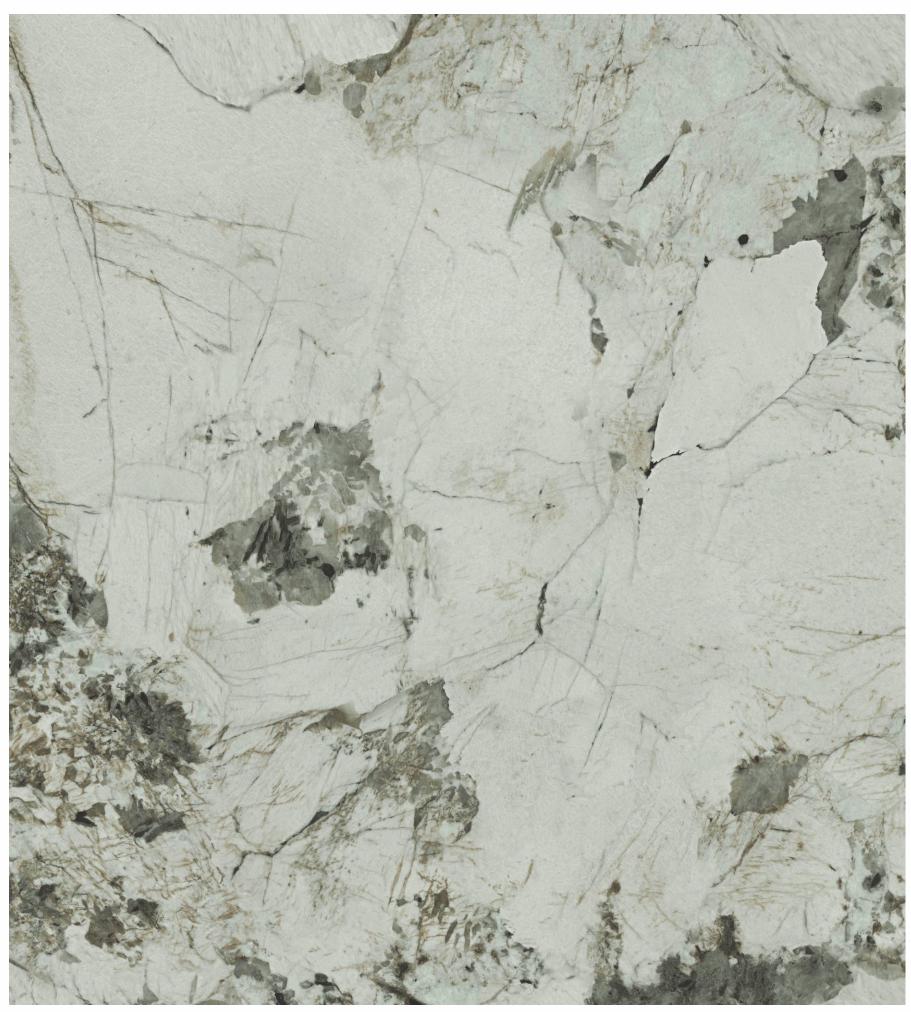

PATAGONIA GREY

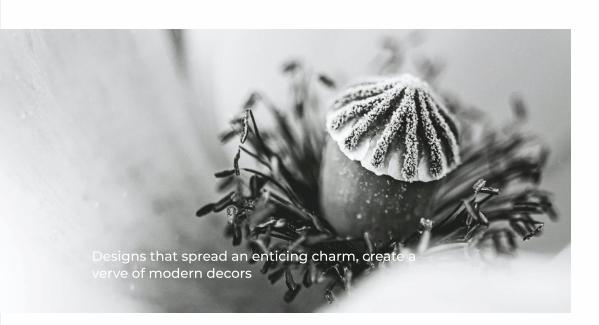




PU 7726 ★★





ARABESCATO GREY



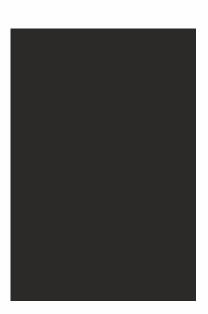



PU 7721 ★★

PU 7720 ★










NERO MARQUINA



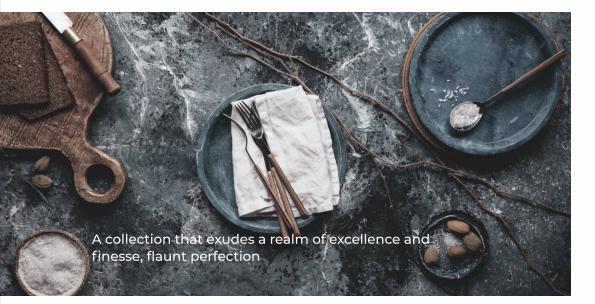







PU 7723 ★★


PU 7703



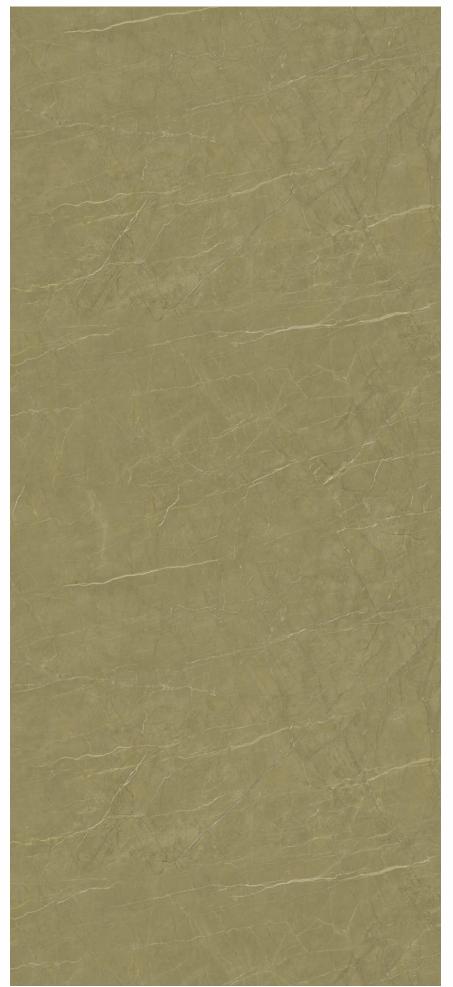









ARMANI GRIS



PU 7707 ★






















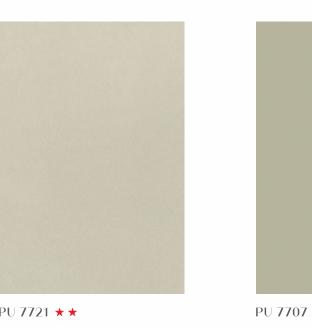

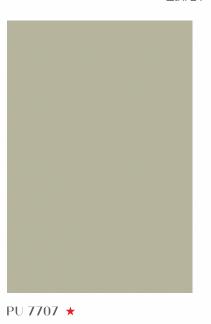

PU 7701 PU 7726 ★★ PU 7721 ★★



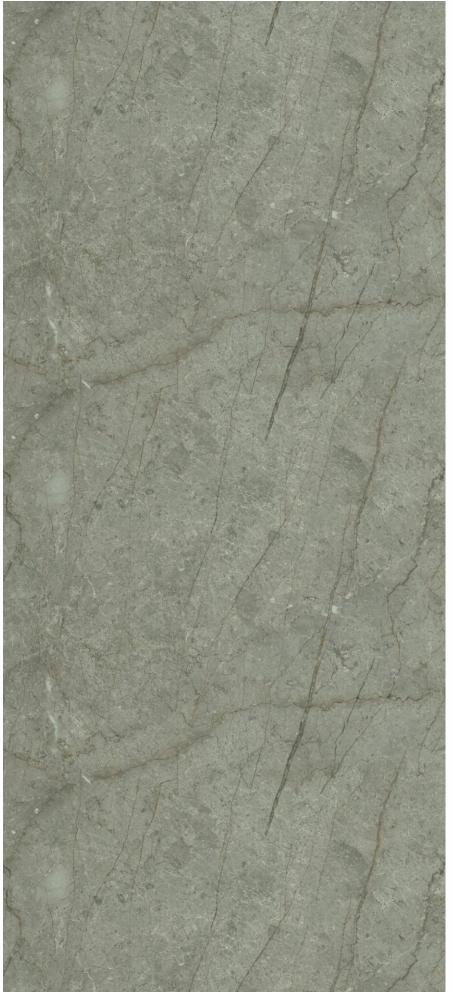









PU 7707 ★ PU 7705 ★

BOTICINO GRIS














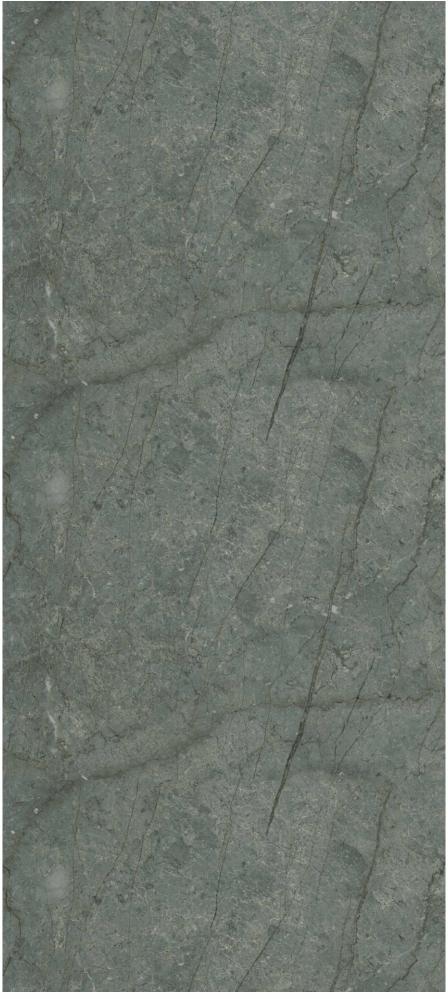











PU **770**1

PU 7721 ★★

PU 7706 ★











MOSCATO PEARL



PU 7707 ★ PU 7726 ★★







T R I A N A C O L L E C T I O N










TRIANA GRIS



PU 7707 ★





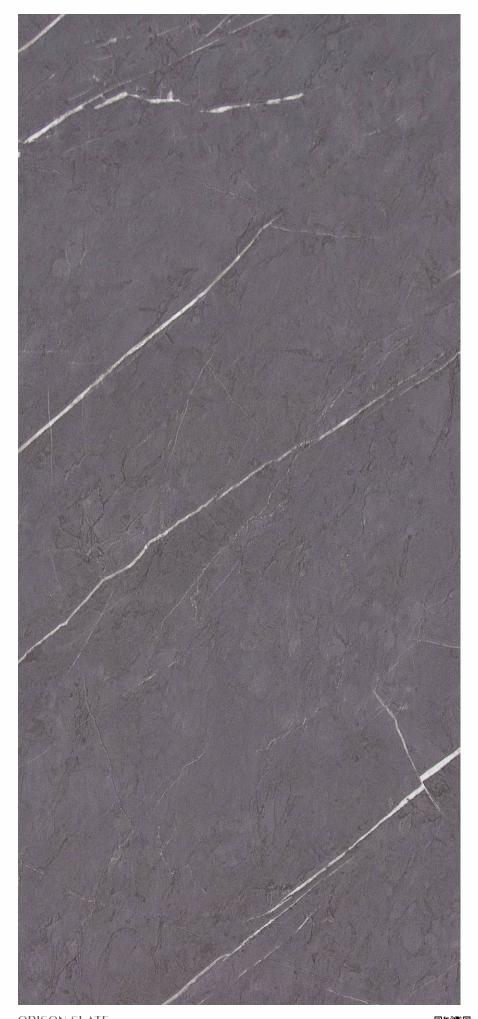






TUSCANA BEIGE



PU **770**1





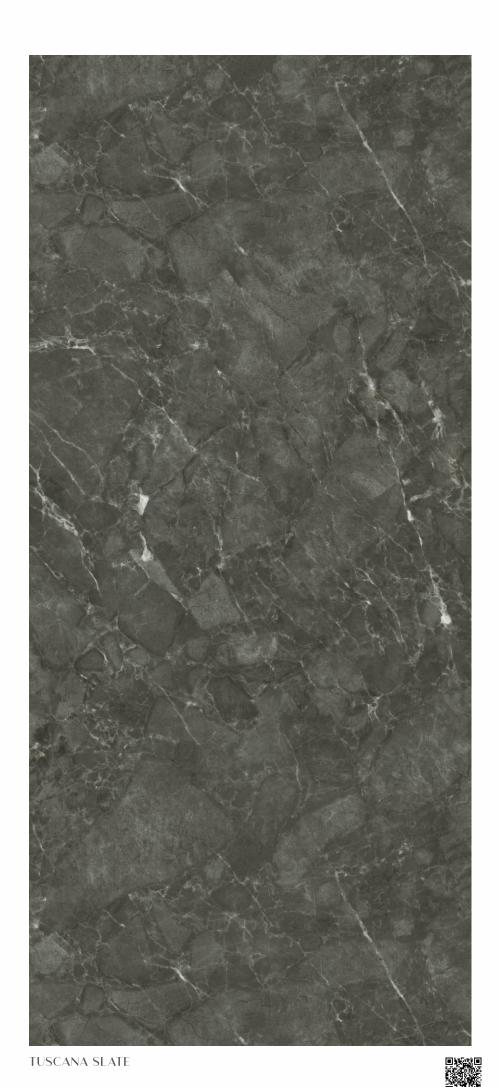





PU 7721 ★★







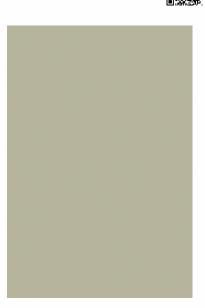

PU **77**01

PU 7707 ★

TECHNICAL SPECIFICATIONS

- It is recommended to not use any kind of masking tape on the surface to avoid damage. Instead, use nailing pressing method to press sheet on plywood/MDF.
- Exposure to direct sunlight can prove detrimental. Also avoid contact with any hot cookware directly over the laminate. Consistent exposure to temperatures above 30-35 degrees celsius can cause severe adverse effects to the laminates.
- 1. Treelam expressly disclaims any representation or warranties of any kind, whether express or implied, as to the accuracy, currency, completeness and/or the merchantability or fitness for a particular purpose of any information contained in or provided via this documentation and/or any service or product described or promoted in this document.
- 2. It is the customer's responsibility to thoroughly examine the product by a qualified person, to determine whether it is suitable for the application it was purchased for.
- 3. Treelam is for indoor use only and should not be exposed to direct sunlight in any form.
- 4. Treelam Laminates is a registered trademark.
- 5. Images and colors should be used as a guide only.
- 6. Treelam warrants that its products are free from manufacturing defects and they are suitable for use under normal conditions. Product must be inspected prior to installation. "NO GUARANTEE, WARRANTY of the product."
- 7. Use suitable adhesive for pasting these sheets.

Parameters	ORISON MARBLE Sheets	High Gloss Laminate Mica	PU coating	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Resistance	YES	NO	NO	NO
Color Consistency	Excellent	Not good	Not good	Not good
Orange peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES



Limited Warranty

PU Laminate Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to inspect products properly before installing. PU Laminate's warranty in no way covers defects and non- compliance from or otherwise attributable to any other causes, including, without limitation the following:


- Improper handling / transportation / storage of PU Laminate
- Improper installation of PU Laminate
- Improper or unintended usage of PU Laminate
- Lack of or improper maintenance of PU Laminate
- Exposure to high temperatures
- Unauthorized alteration to the products
- Outdoor applications
- There will be no guarantee or exchange under any circumstances
- Color variations in products from different batches are possible
- We recommend using products from same batch to avoid color variations
- This brochure is for presentation purposes only.
 Actual colors may differ.

Laminates

To avoid delamination / air bubbles in between ply and laminate the following steps should be taken care of. Bonding of laminate sheets shouldn't be completed under high humidity

Disclaimer

- Do not use plywood with high moisture content
- Do not use ply with uneven surface
- Avoid using inferior quality adhesive
- Apply sufficient pressure

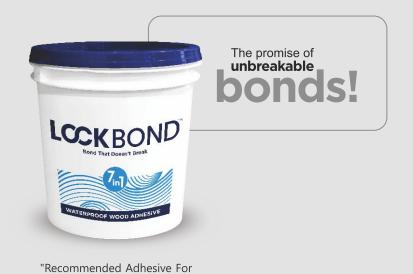

*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations.

Actual colours of the Laminates may vary from this brochure.

Size: 2440 mm x 1220 mm, Thickness: 1.5mm (+- 10%)

FAQS

Reasons for air bubble formations on Laminates



Laminates are bonded in extremely humid conditions



Use of water base synthetic resin adhesive any other than PEVA (Polyethylene Vinyl Acetate Co-polymer)



When substrate loses moisture after installation



Debonding in certain areas because of uneven substrate surface



Insufficient or lack of pressing during the bonding period of laminate



Use of extremely large acrylic/PVC laminate sheets (more than 8 ft x 2ft long)



SCAN THE QR TO VIEW **OUR PRODUCTS**





• OUR PRODUCTS •















































www.treelam.com





